EUKLIDES

MILJØDOKUMENTASJON

CONE W151

W+



Sammendrag fra Euklides og originaldokumentene fra produsent og sertifiseringsorgan, samlet i én fil.

SAMLET 29. OKTOBER 2026
EUKLIDES.NO/PRODUKTER/CONE-W151

Kort fortalt

KLIMAAVTRYKK

28,2 kg CO_2e

M1
DALI (referanseprodukt)

OM TALLENE

Klimaavtrykket er GWP-total for fasene A1-A3 per stk (GWP-total, EN 15804+A2): råvarer, transport til fabrikken og produksjon, oppgitt i kilo CO_2-ekvivalenter. Tallene gjelder den representative stolen i miljødeklarasjonen. Andre utførelser ligger ifølge deklarasjonen innenfor 10 %.

HVA SOM GJELDER

Sammendraget er laget av Euklides for oversikt. Ved prosjektdokumentasjon og anbud er det originaldokumentene i denne filen som gjelder.

Dokumentene

DOKUMENT	UTSTEDT AV	GYLDIG TIL	SIDE
Miljødeklarasjon (EPD) EPD-IES-0031721	EPD International AB (The International EPD System)	25.05.2031	4

FINN DOKUMENTENE SELV

Miljødeklarasjon (EPD)
wastberg.com/pim/WASTBERG-/05_Ceiling_Suspended_CEILING_SUSPENDED/CONE_SUSPENDED_XS_W151XS3/3b8dba5a05e6b2ee8337efcb8673e689b597c1a0865132d330b237fba9fc7e2f_WASTBERG-__26_04_CONE_SUSPENDED_XS_W151XS3_151XS320302_EPD-Certificate.pdf

OM PRODUSENTEN

Spørsmål om dokumentasjonen: post@euklides.no



EPD of multiple products, based on a representative product in accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

CONE SUSPENDED
W151

from W+

Including multiple products of Cone collection. Included products are specified on page 4.

Programme	The International EPD® System www.environdec.com
Programme operator	EPD International AB
EPD Registration number	EPD-IES-0031721:002
Version date	2026-06-02
Validity date	2031-05-25

Wastberg+
T +46 10 16 15 010
info@wastberg.com
wastberg.com

This EPD follows additional requirements for construction products considered as Electronic or Electric Equipment. An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com.

EPD INTERNATIONAL EPD SYSTEM

ECO PLATFORM EPD VERIFIED

Programme information

Programme
The International EPD® System

Address
EPD International AB
Box 210 60
SE-100 31 Stockholm
Sweden

Website
www.environdec.com

E-mail
support@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR)
PCR 2019:14 Construction products version 2.0.1, 2025-06-05.
UN CPC code(s): 4653 (Ver. 2.1) Lighting Equipment

PCR eview was conducted by
The Technical Committee of the International EPD® System.
See www.environdec.com for a list of members.

Review Chair: Rob Rouwette (chair), Noa Meron (co-chair).

The review panel may be contacted via support@environdec.com

Life Cycle Assessment (LCA) Accountability
XAL GmbH, Auer-Welsbach-Gasse 36, 8055 Graz, Austria

Individual EPD verification without a pre-verified LCA/EPD tool.
Third-party verifier:

Rubén Carnerero
IK INGENIERIA
Avd. Cervantes, 51 - 5º - Dpto 7
48970 Basauri (Bizkaia)
r.carnerero@ik-ingenieria.com

Procedure for follow-up of data during EPD validity involves third-party verifier:

☒ Yes ☐ No

Approved by
The International EPD® System
The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.



Owner of the EPD
Wastberg+
Box 5085
200 71 Malmö
Sweden

Contact
epd@wastberg.com

Description of the organisation
We create well-being through good light.

Working closely with leading architects and designers, we develop holistic lighting for humans and spaces.

Name and location of production site: The production sites are located in Dongguan (TBL, China), Murska Sobota (XAL Svetila d.o.o., Slovenia) and in Graz (XAL GmbH, Austria).

More information:
wastberg.com



Product Name
Cone Suspended W151

Product Identification
This EPD covers multiple products of the Cone collection:

– Cone Suspended W151XS1
– Cone Suspended W151XS2
– Cone Suspended W151XS3
– Cone Suspended W151M1 (reference product)
– Cone Suspended W151M2
– Cone Suspended W151M3
– Cone Suspended W151XL1
– Cone Suspended W151XL2
– Cone Suspended W151XL3

All variants are available in different colors. Cone Suspended W151XS and Cone Suspended W151M are offered with both LED-DALI Driver and LED-Phase cut driver, whereas Cone Suspended W151XL is only available with LED-DALI driver. Scaling factors for all variants can be found in Additional Environmental information section.



CONE
SUSPENDED
W151M1



CONE
SUSPENDED
W151M2



CONE
SUSPENDED
W151M3

DIRECT LIGHT

Cone is an exploration of stark geometry and expressive scale. Spanning three different sizes (Extra small, Medium, and Extra large) and conical shapes, the collection moves playfully between compact accents and oversized, striking statements – all the while shaping light and space with clarity and presence. The Extra small serves as the most compact version, ideal as a solitary accent or in creative arrangements. The Medium offers a versatile size suitable for a wide range of everyday settings, retaining the collection's unmistakable character on a more restrained scale. The Extra large makes a bold statement with its exaggerated scale and razor-sharp geometry, adding definition and character to any space.

Design: Claesson Koivisto Rune

TECHNICAL SPECIFICATIONS	**CONE** SUSPENDED W151XS1	**CONE** SUSPENDED W151XS2	**CONE** SUSPENDED W151XS3
Power	7.3 W	7.3 W	7.3 W
Luminous efficacy	Up to 59 lm/W	Up to 62 lm/W	Up to 62 lm/W
Colour temperature	2700 K	2700 K	2700 K
Light control	DALI Push dim Phase-cut dim	DALI Push dim Phase-cut dim	DALI Push dim Phase-cut dim
Physical	Diameter 52 mm Height 130 mm	Diameter 91 mm Height 94 mm	Diameter 151 mm Height 51 mm

TECHNICAL SPECIFICATIONS	**CONE** SUSPENDED W151M1	**CONE** SUSPENDED W151M2	**CONE** SUSPENDED W151M3
Power	11.4 W	11 W	11 W
Luminous efficacy	Up to 55 lm/W	Up to 84 lm/W	Up to 92 lm/W
Colour temperature	2700 K, 3000 K	2700 K, 3000 K	2700 K, 3000 K
Light control	DALI Push dim Phase-cut dim	DALI Push dim Phase-cut dim	DALI Push dim Phase-cut dim
Physical	Diameter 223 mm Height 605 mm	Diameter 380 mm Height 415 mm	Diameter 644 mm Height 214 mm

TECHNICAL SPECIFICATIONS	**CONE** SUSPENDED W151XL1	**CONE** SUSPENDED W151XL2	**CONE** SUSPENDED W151XL3
Power	44 W	44 W	44 W
Luminous efficacy	Up to 85 lm/W	Up to 93 lm/W	Up to 110 lm/W
Colour temperature	2700 K, 3000 K	2700 K, 3000 K	2700 K, 3000 K
Light control	DALI Push dim	DALI Push dim	DALI Push dim
Physical	Diameter 450 mm Height 1270 mm	Diameter 780 mm Height 860 mm	Diameter 1320 mm Height 450 mm

Technical data was tested in house according to following standards:
EN 13032-1: 2004 +A1: 2012
EN 13032-4: 2015 +A1: 2019
CIE S 025/E: 2015
IES LM-79-19: 2019

UN CPC code(s):
4653 (Ver. 2.1) Lighting Equipment

CONTENT DECLARATION PER DECLARED UNIT

The content declaration below applies to Cone Suspended W151M1. Other variants follow a similar material composition.

PRODUCT COMPONENTS	WEIGHT, KG	WEIGHT-% (VERSUS TOTAL WEIGHT)	POST-CONSUMER MATERIAL, WEIGHT-%	BIOGENIC MATERIAL, WEIGHT-% / DECLARED UNIT	BIOGENIC MATERIAL, KG C / DECLARED UNIT
Aluminum	1.00	56.69	0.00	0.00	0.00
Copper	0.14	8.00	0.00	0.00	0.00
Steel	0.14	7.96	0.00	0.00	0.00
Polytetrafluorethylene	0.11	6.19	0.00	0.00	0.00
Polymethylmethacrylate	0.10	5.60	0.00	0.00	0.00
Polycarbonate	0.07	4.22	0.00	0.00	0.00
Epoxy-Resin	0.07	4.16	0.00	0.00	0.00
Glass fibers	0.04	2.11	0.00	0.00	0.00
Polyphenylene ether	0.04	2.00	0.00	0.00	0.00
Others (<1%)	0.05	3.07	0.00	0.02	0.00
TOTAL	**1.76**	**100.00**	**0.00**	**0.02**	**0.00**

PACKAGING MATERIALS*	WEIGHT, KG	WEIGHT-% (VERSUS THE PRODUCT)	WEIGHT BIOGENIC CARBON, KG C / DECLARED UNIT
Paper	0.005	0.26	0.002
Cardboard	1.704	97.06	0.862
Plastic	0.045	2.56	0.000
Total	**1.754**	**99.87**	**0.864**

*Disclaimer: The packaging material table includes only product packaging. Transport packaging also included in the LCA.

The products do not contain any REACH and RoHS SVHC substances in amounts greater than 0.1 % (1 000 ppm).

Declared unit
The declared unit is one piece of Cone Suspended W151M1 DALI Push dim, 3000 K. This product has been chosen as the reference due to the highest share of sales. The weight of the product per declared unit is 1.756kg.

For better comparison with other types of luminaires, conversion factors are also available to convert the results to 1000 lumens during a reference lifetime of 35000 hours. This reference value is proposed by the PEP Category rules (PSR-0014-ed2.0-EN-2023 07 13). The conversion factors are available under "Additional environmental information".

The principles of "Modularity" and "polluter pay" have been followed.

Reference service live
10.3 years
Time representativeness
2025 - 2026
Database and LCA software used
LCA for Experts 10.9.5.2
System boundaries
Cradle to gate with options, modules C1-C4, module D and with optional modules

System diagram

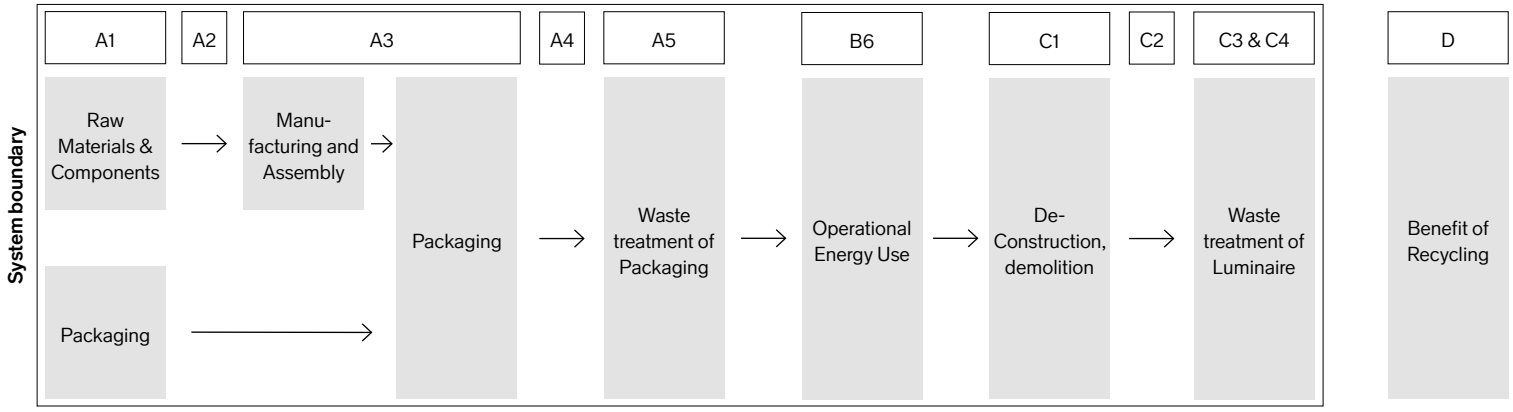

Allocation
Allocation by sales shares was done to identify the associated quantity of flows that are common for the factory: electricity and Natural gas for general factory needs and packaging, use of packaging materials and packaging waste from delivered components.

Product stage (A1 – A3)
Raw materials are found in the components used for the luminaire production. The raw materials and the necessary process steps have been modelled using LCA for Experts 10.9.5.2. For XS and M, the final assembly of the luminaires is done in Dongguan, China. XL is produced in Graz, Austria and Murska Sobota, Slovenia, the production facilities operate in a complementary manner, with each product passing through both facilities. The waste generated during the manufacturing process was handled in A3 according to the waste allocation method. Finished assembly and transportation to Belgium and from Belgium sales to the world. The corresponding electricity mix and natural gas have been used for manufacturing. Production losses are close to zero and therefore not included in the LCA. Transportation of all the components is incorporated. For the components which are delivered from China, aggregated data has been used, since transportation involved various routes and transport vehicles. It is calculated that 24% are delivered by plane and 76% by ship from Dongguan to Belgium. Packaging for the components has been accounted for using a worst-case approach. Location based approach has been used for manufacturing stage electricity mix modelling due to a lack of information about the residual supplier or national mix.

Transport to building (A4)
The transport is calculated from Brussel to the capitals of the countries with expected sales shares >4% (Berlin, Stockholm, Oslo, Berne, Vienna, London, Warsaw, Madrid, Pairs). The product market includes countries all over the world.

Weighted distance	1089 km
Truck used	Class EURO 6, 26-28 t
Fuel type	Diesel (0.00287 l/100 kkm)

Installation into building (A5)
No emissions occur during the installation. This module includes the waste treatment of the packaging.

Packaging waste incl. transport packaging:

Material	Weight (kg)
Cardboard	2.41
Paper	0.05
Plastic	0.05

Operational energy use (B6)
Electricity consumption during the use stage is modelled based on the technical parameters, representative for an average lifetime of 10.3 years. The operating hours are based on the average application areas in accrodance with EN 15193-1:2017+A1:2021. The products are mainly installed in residential buildings, offices, restaurants and other commercial premises. Geography of the electricity mix is modelled by sales shares and is representative for European countries (93% - EU-28) and rest of world countries (7%). For the rest of world countries, an electricity mix for China is used following a worst-case approach. For variants with optical light sensors, the energy consumption has been adjusted as recommended in the guidelines of PSR-0014-ed2.0-EN-2023 07 13.

The electricity consumption per product unit is calculated using the formula:
Energy consumption [kWh] = {Pa × 1 kW / 1000W x operating hours p/a [h] x reference service lifetime [y]}

The results and additional Use Phase Information is presented in the table below:

SCENARIO	**CONE** SUSPENDED W151M1	**UNIT**
Electricity use (10.3 years)	412.2	kWh
Active power	11.6	W
Operating hours (h/y)	3450	hours
Dimmable	DALI Push dim	hours
Presence control	NO	-

End-of-life stage (C1-C4)
The product is presumed to be decomposed manually; therefore, no emissions should occur in C1. In accordance with PCR 2.0.1, the following transport distances are used for end-of-life waste treatment:

– Waste not destined for incineration: 80 km
– Waste destined for incineration: 130 km

Based on official statistics and literature, waste treatment options are taken into account for Europe and rest of the world countries.

SCENARIO	CONE SUSPENDED W151M1	UNIT
Collected separately	1.756	kg
Collected with mixed (construction) waste	-	kg
For reuse	-	kg
For recycling	1.084	kg
For energy recovery	0.205	kg
For final disposal	0.467	kg

Module D
According to the guidelines of EN 15804+A2 and the PCR from EPD International, calculations are made for Module D. The loads and benefits result from the export of secondary materials and the energy which comes from incineration and landfilling. In Module D also the benefits from the product packaging waste are included.

SCENARIO	CONE SUSPENDED W151M1	UNIT
Materials for recycling	3.087	kg
Materials for export of secondary fuels	-	kg
Materials for incineration	0.450	kg

Cut-off rules
Consistent with the PCR, a minimum of 95% of total inflows (mass and energy) are included. In addition, materials and processes with insignificant contributions of less than 1% are also included. For the use and end-of-life stage, scenarios are used, factoring in geographical conditions (such as electricity mix) and applications (waste treatment practices).

The following processes have been excluded:

– Manufacture of equipment used in production, buildings or any other capital goods;
– The transportation of personnel to the plant;
– Transportation of personnel within the plant;
– Research and development activities;
– Long-term emissions.

The following modules have been excluded:

– B1: For the use stage (B1), no energy and material inputs, or emissions are involved.
– B2-B5: During the reference service life no maintenance (B2), repair (B3), replacement (B4) or refurbishment (B5) is expected.
– B7: The use of the product does not require water consumption (B7).

Data quality
This LCA study reflects the production for 2025-2026, while overhead electricity consumption is based on 2025 data. Components are sourced from external suppliers, and their manufacturing processes are modeled using LCA for Experts, applying the most suitable representative geographical conditions and applications. Geographical representativeness is global, mainly China, Austria, and Slovenia. LCI data quality is very good / good.

Electricity grid
For the manufacturing in Dongguan, China, the corresponding electricity grid mix as stated on the invoice is used: Hard coal (32.2 %), Hydro (22.4 %), Photovoltaic (28.8 %), Wind (9.2 %), Nuclear (3.8 %), other RE (3.6 %).

For the manufacturing in Graz, Austria, the corresponding electricity grid mix as stated on the invoice is used: Photovoltaic (84.08 %), Hydro Power (10.07 %), other RE (5.85 %).

For Murska Sobota, Slovenia, the corresponding electricity grid mix is: Hydro Power (60.60 %), Photovoltaic (39.40 %).

ENVIRONMENTAL IMPACT OF THE ELECTRICITY USED	CN	AUT	SLO
CO_2 eq. [kg/kWh]	0.382	0.022	0.013

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				RESOURCE RECOVERY STAGE
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	**A1**	**A2**	**A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
Modules declared	x	x	x	x	x	ND	ND	ND	ND	ND	x	ND	x	x	x	x	x
Geography	GLO	GLO	CN, AUT, SLO	GLO	GLO	-	-	-	-	-	GLO	-	GLO	GLO	GLO	GLO	GLO
Share of primary data	27.47%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	-72%/+378%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Acronyms	GLO = Global, CN = China, AUT = Austria, SLO = Slovenia																

Primary data used

The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

Calculation of primary data used for module A1-A3:

PROCESS	SOURCE TYPE	SOURCE	REFERENCE YEAR	DATA CATEGORY	SHARE OF PRIMARY DATA OF GWP-GHG RESULTS FOR A1-A3
Transport of raw materials to manufacturing site	Collected Data	EPD Owner, Suppliers	2025-2026	Primary data	15.18%
Electricity used in manufacturing	Collected Data	EPD Owner	2025-2026	Primary data	11.99%
Others (<10% each)	Collected Data	EPD Owner	2025-2026	Primary data	0.31%
Total share of primary data of GWP-GHG results for A1-A3					27.47%

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. Usage of results from A1-A3 without considering the results of module C is not encouraged.

MANDATORY IMPACT CATEGORY INDICATORS ACCORDING TO EN 15804+A2 (BASED ON EF 3.1)

		Results per declared unit								
Indicator	**Unit**	**A1 – A3**	**A4**	**A5**	**B6**	**C1**	**C2**	**C3**	**C4**	**D**
GWP – fossil	kg CO_2 eq.	3.28E+01	4.93E-01	9.04E-02	1.49E+02	0.00E+00	1.55E-02	7.31E-01	8.04E-03	-1.35E+01
GWP – biogenic	kg CO_2 eq.	-4.55E+00	0.00E+00	4.55E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GWP – luluc	kg CO_2 eq.	1.49E-02	5.48E-03	1.25E-04	3.84E-01	0.00E+00	6.78E-05	7.47E-05	1.35E-05	-1.74E-02
GWP – total	**kg CO_2 eq.**	**2.82E+01**	**4.99E-01**	**4.64E+00**	**1.50E+02**	**0.00E+00**	**1.56E-02**	**7.31E-01**	**8.05E-03**	**-1.35E+01**
ODP	kg CFC 11 eq.	4.65E-09	2.45E-13	3.09E-13	9.72E-09	0.00E+00	3.25E-15	1.08E-12	3.40E-14	-2.16E-10
AP	mol H+ eq.	1.88E-01	7.18E-04	2.27E-04	3.83E-01	0.00E+00	2.46E-05	2.14E-04	5.46E-05	-5.16E-02
EP – freshwater	kg P eq.	5.00E-04	9.90E-07	2.21E-06	1.61E-04	0.00E+00	4.04E-08	7.74E-08	1.15E-08	3.09E-06
EP – marine	kg N eq.	3.70E-02	2.92E-04	1.03E-04	9.19E-02	0.00E+00	9.94E-06	6.29E-05	1.36E-05	-1.02E-02
EP – terrestrial	mol N eq.	3.97E-01	3.23E-03	9.36E-04	1.07E+00	0.00E+00	1.07E-04	9.59E-04	1.50E-04	-1.11E-01
POCP	kg NMVOC eq.	1.06E-01	6.83E-04	3.11E-04	2.24E-01	0.00E+00	2.17E-05	1.63E-04	4.17E-05	-2.78E-02
ADP – minerals & metals*	kg Sb eq.	7.38E-04	4.24E-08	4.78E-09	3.33E-05	0.00E+00	1.16E-09	9.84E-09	7.37E-10	-1.89E-04
ADP – fossil*	MJ	4.12E+02	6.32E+00	7.20E-01	2.62E+03	0.00E+00	2.06E-01	6.95E-01	1.19E-01	-1.59E+02
WDP*	m^3	8.51E+00	1.73E-03	4.60E-02	3.14E+01	0.00E+00	5.50E-05	8.00E-02	9.24E-04	-1.62E+00

Acronyms: GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

*Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

MANDATORY AND VOLUNTARY IMPACT CATEGORY INDICATORS

		Results per declared unit								
Indicator	**Unit**	**A1 – A3**	**A4**	**A5**	**B6**	**C1**	**C2**	**C3**	**C4**	**D**
GWP – GHG1	kg CO_2 eq.	3.28E+01	4.99E-01	9.06E-02	1.50E+02	0.00E+00	1.56E-02	7.31E-01	8.05E-03	-1.35E+01
PM	disease inc.	2.94E-06	7.16E-09	1.83E-09	3.58E-06	0.00E+00	2.43E-10	2.32E-09	6.53E-10	-7.27E-07
IRP – HE**	kg U235-eq	8.29E-01	6.34E-04	2.25E-03	5.04E+01	0.00E+00	2.74E-05	8.46E-03	1.54E-04	-4.04E-01
ETP – fw*	CTUe	3.10E+02	5.48E+00	5.17E-01	5.99E+02	0.00E+00	1.76E-01	2.26E-01	7.44E-02	-5.08E+01
HTP – c*	CTUh	2.20E-07	9.79E-11	1.29E-11	4.24E-08	0.00E+00	3.51E-12	1.96E-11	5.32E-12	-8.23E-09
HTP – nc*	CTUh	4.73E-07	3.76E-09	8.20E-10	1.30E-06	0.00E+00	1.84E-10	1.22E-09	5.01E-10	-1.00E-07
SQP	dimensionless	1.95E+02	1.83E+00	1.65E-01	1.04E+03	0.00E+00	5.56E-02	2.47E-01	2.61E-02	4.18E+02

Acronyms: PM = particulate matter emissions. IRP-HE = ionizing radiation potential-human exposure. ETP-fw = ecotoxicity (freshwater). HTP-c = human toxicity potential. cancer effects. HTP-nc = human toxicity potential. non-cancer effects. SQP = land use related impacts.

[1] The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

RESOURCE USE INDICATORS

		Results per declared unit								
Indicator	**Unit**	**A1 – A3**	**A4**	**A5**	**B6**	**C1**	**C2**	**C3**	**C4**	**D**
PERE	MJ	2.53E+02	4.96E-01	1.26E-01	1.90E+03	0.00E+00	1.43E-02	3.89E-01	1.96E-02	-5.80E+00
PERM	MJ	4.41E+01	0.00E+00	-4.40E+01	0.00E+00	0.00E+00	0.00E+00	-5.15E-02	0.00E+00	0.00E+00
PERT	MJ	2.97E+02	4.96E-01	-4.39E+01	1.90E+03	0.00E+00	1.43E-02	3.37E-01	1.96E-02	-5.80E+00
PENRE	MJ	4.12E+02	6.32E+00	7.20E-01	2.62E+03	0.00E+00	2.06E-01	1.88E+00	1.19E-01	-1.59E+02
PENRM	MJ	6.82E+00	0.00E+00	-1.89E+00	0.00E+00	0.00E+00	0.00E+00	-4.94E+00	0.00E+00	0.00E+00
PENRT	MJ	4.19E+02	6.32E+00	-1.17E+00	2.62E+03	0.00E+00	2.06E-01	-3.06E+00	1.19E-01	-1.59E+02
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-1.54E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m^3	3.84E-01	1.88E-04	1.11E-03	1.31E+00	0.00E+00	4.17E-06	1.99E-03	2.74E-05	-6.39E-02

Acronyms: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

WASTE INDICATORS

		Results per declared unit								
Indicator	**Unit**	**A1 – A3**	**A4**	**A5**	**B6**	**C1**	**C2**	**C3**	**C4**	**D**
Hazardous waste disposed	kg	2.48E-04	3.62E-10	2.23E-09	3.78E-06	0.00E+00	8.71E-12	6.12E-10	1.91E-11	2.68E-08
Non-hazardous waste disposed	kg	5.20E+00	1.20E-03	2.04E-01	2.20E+00	0.00E+00	3.79E-05	8.09E-02	4.67E-01	-3.12E+00
Radioactive waste disposed	kg	7.95E-03	6.85E-06	1.52E-05	3.34E-01	0.00E+00	2.18E-07	5.96E-05	1.27E-06	-4.19E-03

OUTPUT FLOW INDICATORS

		Results per declared unit								
Indicator	**Unit**	**A1 – A3**	**A4**	**A5**	**B6**	**C1**	**C2**	**C3**	**C4**	**D**
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	6.81E-01	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy. electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.10E+00	0.00E+00	5.62E-01
Exported energy. thermal	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.56E+00	0.00E+00	1.02E+00

Additional LCA results
Results for additional scenarios for End-of-Life modules.
Mandatory impact category indicators according to EN 15804 + A2 (based on EF 3.1)

		100% RECYCLING			**100% INCINERATION**			**100% LANDFILL**		
Indicator	**Unit**	**C2**	**C3**	**C4**	**C2**	**C3**	**C4**	**C2**	**C3**	**C4**
GWP – fossil	kg CO_2 eq.	1.45E-02	4.27E-01	0.00E+00	2.35E-02	1.50E+00	0.00E+00	1.45E-02	0.00E+00	3.54E-02
GWP – biogenic	kg CO_2 eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GWP – luluc	kg CO_2 eq.	6.32E-05	2.78E-04	0.00E+00	1.03E-04	1.68E-05	0.00E+00	6.32E-05	0.00E+00	5.40E-05
GWP – total	kg CO_2 eq.	1.45E-02	4.28E-01	0.00E+00	2.36E-02	1.50E+00	0.00E+00	1.45E-02	0.00E+00	3.54E-02
GWP-GHG	kg CFC 11 eq.	1.45E-02	4.28E-01	0.00E+00	2.36E-02	1.50E+00	0.00E+00	1.45E-02	0.00E+00	3.54E-02
ODP	kg CFC 11 eq.	3.03E-15	3.96E-12	0.00E+00	4.93E-15	-2.78E-12	0.00E+00	3.03E-15	0.00E+00	1.91E-13
AP	mol H+ eq.	2.30E-05	3.96E-04	0.00E+00	3.73E-05	4.79E-04	0.00E+00	2.30E-05	0.00E+00	2.30E-04
EP – freshwater	kg P eq.	3.77E-08	5.51E-07	0.00E+00	6.12E-08	-1.14E-07	0.00E+00	3.77E-08	0.00E+00	3.49E-06
EP – marine	kg N eq.	9.27E-06	1.32E-04	0.00E+00	1.51E-05	1.77E-04	0.00E+00	9.27E-06	0.00E+00	5.56E-05
EP – terrestrial	mol N eq.	1.00E-04	1.59E-03	0.00E+00	1.63E-04	2.37E-03	0.00E+00	1.00E-04	0.00E+00	6.10E-04
POCP	kg NMVOC eq.	2.03E-05	3.27E-04	0.00E+00	3.29E-05	4.65E-04	0.00E+00	2.03E-05	0.00E+00	1.71E-04
ADP – minerals & metals*	kg Sb eq.	1.08E-09	3.02E-08	0.00E+00	1.75E-09	-1.56E-08	0.00E+00	1.08E-09	0.00E+00	2.97E-09
ADP – fossil*	MJ	1.92E-01	1.92E+00	0.00E+00	3.13E-01	2.25E+00	0.00E+00	1.92E-01	0.00E+00	5.56E-01
WDP*	m^3	5.12E-05	7.39E-02	0.00E+00	8.32E-05	2.91E-01	0.00E+00	5.12E-05	0.00E+00	4.18E-03

Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Scaling factors for other variants

The different variants of Cone Suspended W151 are very similar but show some differences in their construction or dimension. Those differences have been accounted for in the LCA. The results of the environmental performance indicators above can be scaled to the corresponding variants with the following conversion factors. The scaling factors were determined using the GWP-GHG indicator and are only valid for this indicator.

VARIANT	DRIVER USED	A1 – A3	A4	A5	B6	C1-C4	D
CONE SUSPENDED W151XS1	DALI Push dim	0.28	0.18	0.78	0.63	0.39	0.07
CONE SUSPENDED W151XS1	Phase-cut dim	0.26	0.18	0.78	0.63	0.38	0.07
CONE SUSPENDED W151XS2	DALI Push dim	0.36	0.23	0.72	0.63	0.41	0.13
CONE SUSPENDED W151XS2	Phase-cut dim	0.34	0.23	0.72	0.63	0.40	0.12
CONE SUSPENDED W151XS3	DALI Push dim	0.42	0.30	1.03	0.63	0.46	0.16
CONE SUSPENDED W151XS3	Phase-cut dim	0.40	0.29	1.03	0.63	0.46	0.16
CONE SUSPENDED W151M1	DALI Push dim	1.00	1.00	1.00	1.00	1.00	1.00
CONE SUSPENDED W151M1	Phase-cut dim	0.98	1.00	1.00	1.00	0.99	1.00
CONE SUSPENDED W151M2	DALI Push dim	1.22	1.45	1.34	0.97	1.48	0.94
CONE SUSPENDED W151M2	Phase-cut dim	1.20	1.44	1.34	0.97	1.47	0.94
CONE SUSPENDED W151M3	DALI Push dim	1.70	2.35	2.32	0.97	2.87	1.30
CONE SUSPENDED W151M3	Phase-cut dim	1.68	2.34	2.32	0.97	2.87	1.30
CONE SUSPENDED W151XL1	DALI Push dim	2.77	2.16	7.57	0.35	2.63	1.63
CONE SUSPENDED W151XL2	DALI Push dim	3.11	2.60	8.66	0.35	2.96	2.19
CONE SUSPENDED W151XL3	DALI Push dim	3.78	2.86	13.29	0.35	4.20	2.06

The maximum scaling factor of 378% for the A1-A3 stages is primarily attributed to the product with the largest dimensions and weight, namely Cone Suspended W151XL3. This factor directly correlates with the significant variation in resource use and emissions, aligning with ISO 14025 requirements for reporting product family variability.

Results for 1000 lumens during a reference life of 35000 hours (As per reference of PEP-ECO Passport PSR-0014-ed2.0-EN-2023 07 13).

A conversion factor can be used for converting the results to 1000 lumens during a reference life of 35000 hours.

VARIANT	CCT	Colour	A1-A3	A4	A5	B6	C1-C4	D
CONE SUSPENDED W151XS1	2700K	Traffic white	2.34	2.34	2.34	2.54	2.34	2.34
CONE SUSPENDED W151XS1	2700K	Jet black	2.57	2.57	2.57	2.80	2.57	2.57
CONE SUSPENDED W151XS1	2700K	Raw Aluminium	2.49	2.49	2.49	2.71	2.49	2.49
CONE SUSPENDED W151XS2	2700K	Traffic white	2.22	2.22	2.22	2.42	2.22	2.22
CONE SUSPENDED W151XS2	2700K	Jet black	2.44	2.44	2.44	2.66	2.44	2.44
CONE SUSPENDED W151XS2	2700K	Raw Aluminium	2.39	2.39	2.39	2.60	2.39	2.39
CONE SUSPENDED W151XS3	2700K	Traffic white	2.22	2.22	2.22	2.42	2.22	2.22
CONE SUSPENDED W151XS3	2700K	Jet black	2.44	2.44	2.44	2.66	2.44	2.44
CONE SUSPENDED W151XS3	2700K	Raw Aluminium	2.39	2.39	2.39	2.60	2.39	2.39
CONE SUSPENDED W151M1	2700K	Traffic white	1.58	1.58	1.58	1.72	1.58	1.58
CONE SUSPENDED W151M1	2700K	Jet black	3.40	3.40	3.40	3.70	3.40	3.40
CONE SUSPENDED W151M1	2700K	Raw Aluminium	2.58	2.58	2.58	2.81	2.58	2.58
CONE SUSPENDED W151M2	2700K	Traffic white	1.08	1.08	1.08	1.18	1.08	1.08
CONE SUSPENDED W151M2	2700K	Jet black	2.33	2.33	2.33	2.53	2.33	2.33
CONE SUSPENDED W151M2	2700K	Raw Aluminium	1.87	1.87	1.87	2.03	1.87	1.87
CONE SUSPENDED W151M3	2700K	Traffic white	0.99	0.99	0.99	1.08	0.99	0.99
CONE SUSPENDED W151M3	2700K	Jet black	2.13	2.13	2.13	2.32	2.13	2.13
CONE SUSPENDED W151M3	2700K	Raw Aluminium	1.66	1.66	1.66	1.80	1.66	1.66
CONE SUSPENDED W151XL1	2700K	Traffic white	0.28	0.28	0.28	0.31	0.28	0.28
CONE SUSPENDED W151XL1	2700K	Jet black	0.60	0.60	0.60	0.65	0.60	0.60
CONE SUSPENDED W151XL1	2700K	Red orange	0.54	0.54	0.54	0.59	0.54	0.54
CONE SUSPENDED W151XL1	2700K	Raw Aluminium	0.46	0.46	0.46	0.50	0.46	0.46
CONE SUSPENDED W151XL2	2700K	Traffic white	0.26	0.26	0.26	0.28	0.26	0.26
CONE SUSPENDED W151XL2	2700K	Jet black	0.55	0.55	0.55	0.60	0.55	0.55
CONE SUSPENDED W151XL2	2700K	Red orange	0.48	0.48	0.48	0.53	0.48	0.48
CONE SUSPENDED W151XL2	2700K	Raw Aluminium	0.43	0.43	0.43	0.47	0.43	0.43
CONE SUSPENDED W151XL3	2700K	Traffic white	0.22	0.22	0.22	0.24	0.22	0.22
CONE SUSPENDED W151XL3	2700K	Jet black	0.46	0.46	0.46	0.50	0.46	0.46
CONE SUSPENDED W151XL3	2700K	Red orange	0.41	0.41	0.41	0.45	0.41	0.41
CONE SUSPENDED W151XL3	2700K	Raw Aluminium	0.37	0.37	0.37	0.40	0.37	0.37
CONE SUSPENDED W151M1	3000K	Traffic white	1.58	1.58	1.58	1.72	1.58	1.58
CONE SUSPENDED W151M1	3000K	Jet black	3.40	3.40	3.40	3.70	3.40	3.40
CONE SUSPENDED W151M1	3000K	Raw Aluminium	2.58	2.58	2.58	2.81	2.58	2.58
CONE SUSPENDED W151M2	3000K	Traffic white	1.08	1.08	1.08	1.18	1.08	1.08
CONE SUSPENDED W151M2	3000K	Jet black	2.33	2.33	2.33	2.53	2.33	2.33
CONE SUSPENDED W151M2	3000K	Raw Aluminium	1.87	1.87	1.87	2.03	1.87	1.87
CONE SUSPENDED W151M3	3000K	Traffic white	0.99	0.99	0.99	1.08	0.99	0.99
CONE SUSPENDED W151M3	3000K	Jet black	2.13	2.13	2.13	2.32	2.13	2.13
CONE SUSPENDED W151M3	3000K	Raw Aluminium	1.66	1.66	1.66	1.80	1.66	1.66
CONE SUSPENDED W151XL1	3000K	Traffic white	0.27	0.27	0.27	0.29	0.27	0.27
CONE SUSPENDED W151XL1	3000K	Jet black	0.58	0.58	0.58	0.63	0.58	0.58
CONE SUSPENDED W151XL1	3000K	Red orange	0.52	0.52	0.52	0.56	0.52	0.52
CONE SUSPENDED W151XL1	3000K	Raw Aluminium	0.44	0.44	0.44	0.48	0.44	0.44
CONE SUSPENDED W151XL2	3000K	Traffic white	0.24	0.24	0.24	0.27	0.24	0.24
CONE SUSPENDED W151XL2	3000K	Jet black	0.52	0.52	0.52	0.56	0.52	0.52
CONE SUSPENDED W151XL2	3000K	Red orange	0.46	0.46	0.46	0.50	0.46	0.46
CONE SUSPENDED W151XL2	3000K	Raw Aluminium	0.41	0.41	0.41	0.45	0.41	0.41
CONE SUSPENDED W151XL3	3000K	Traffic white	0.21	0.21	0.21	0.22	0.21	0.21
CONE SUSPENDED W151XL3	3000K	Jet black	0.45	0.45	0.45	0.48	0.45	0.45
CONE SUSPENDED W151XL3	3000K	Red orange	0.39	0.39	0.39	0.43	0.39	0.39
CONE SUSPENDED W151XL3	3000K	Raw Aluminium	0.35	0.35	0.35	0.38	0.35	0.35

Information related to the sectorial EPD

This EPD is not sectoral.

Version History

1st version published 2026-05-26

2nd version published 2026-06-02

– Editorial update only

ADPE – Abiotic depletion potential non-fossil resources
ADPF – Abiotic depletion potential fossil resources
AP – Acidification potential, accumulated exceedance
AUT – Austria
CB – Certification Body
CRU – Components for re-use
d/i – direct / indirect
DALI – Digital Adressable Lighting Interface
EEE – Exported electrical energy
EET – Exported thermal energy
EPD – Environmental Product Declaration
EP-freshwater – Eutrophication potential freshwater
EP-marine – Eutrophication potential marine
EP-terrestrial – Eutrophication potential terrestrial
ETP-fw – Eco toxicity freshwater
FW – Net use of fresh water
GLO – Global
GWP-biogenic – Global warming potential biogenic
GWP-fossil – Global warming potential fossil fuels
GWP-GHG – Global warming potential
GWP-luluc – Global warming potential land use and land use change
GWP-total – Global warming potential total
HTTP-c – Human toxicity, cancer effect
HTTP-nc – Human toxicity, non-cancer effects
HWD – Hazardous waste disposed
IRP – Ionizing radiation, human health
LCA – Life Cycle Assessment
MER – Materials for energy recovery
MFR – Materials for recycling
NHWD – Non–harzardous waste disposed
NRSF – Use of non–renewable secondary fuels
ODP – Depletion potential of the stratospheric ozone layer
PCR – Product Category Rules
PENRE – Use of non renewable primary energy as energy carrier
PENRM – Use of non renewable primary energy resources used as raw materials
PENRT – Total use of non renewable primary energy resource
PERE – Use of renewable primary energy as energy carrier
PERM – Use of renewable primary energy resources used as raw materials
PERT – Total use of renewable primary energy
PM – Particulate matter emissions
PMMA – Polymethylmetacrylate
POCP – Photochemical ozone creation potential
PSR – Product Specific Rules
RE – Renewable Energy
RSF – Use of renewable secondary fuels
RWD – Radioactive waste disposed
SLO – Slovenia
SM – Use of secondary material
SQP – Land use related impacts/Soil quality
UN CPC – United Nations Central Product Classification
WDP – Water (user) deprivation potential

EN 15804:2012+A2:2019 /AC:2021 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products.

EN 15193-1:2017+A1:2021 Energy performance of building – Energy requirements for lighting

European court of auditors. EU actions and existing challenges on electronic waste. Review No. 4. 2021

General Programme Instructions of the International EPD. System. Version 5.0.1.

ISO 14020:2000 – Environmental labels and declarations – General principles

ISO 14025:2006 - Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 14040:2021 Environmental management — Life cycle assessment — Principles and framework

ISO 14044:2021 Environmental management — Life cycle assessment — Requirements and guidelines

LCA Background Report. CONE W151. XAL GmbH. 2026-05-07

LCA for Experts 10.9.5.2 (Sphera)

PCR-ed4-EN-2021 09 062021. P.E.P. Association. Product Category Rules for Electrical Electronic and HVAC-R Products

Product category rules (PCR) 2019:14 Construction products version 2.0.1. 2025-06-05. The EPD International. 2025

PSR-0014-ed2.0-EN-2023 07 13. PSR SPECIFIC RULES FOR LUMINAIRES.
According to PSRmodele-ed2-EN-2021 11 18.